




# METRIC FASTENERS

## Carriage Bolts Square Neck (Large)

# CAP SCREWS & BOLTS

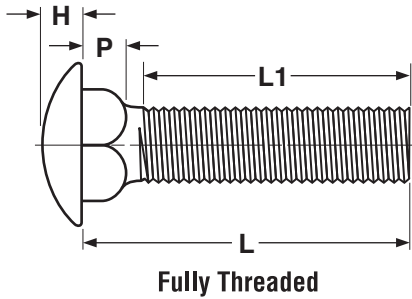

### METRIC - CARRIAGE BOLTS

ISO 8677;  
DIN 603;  
JIS B 1171

Nominal Diameter	Pitch (mm)	O		C	P		A		H		L <sub>1</sub>		
		Square Width Across Flats		Square Width Across Corners	Square Depth		Head Diameter		Head Height		Thread Length ≤125	Thread Length >125 & ≤200	Thread Length >200
mm		Max	Min	Min	Max	Min	Max	Min	Max	Min	Ref	Ref	Ref
M5	0.8	5.48	4.52	5.9	4.1	2.9	13	11.9	3.1	2.5	16	20	-
M6	1	6.48	5.52	7.2	4.6	3.4	16	14.9	3.6	3	18	24	-
M8	1.25	8.58	7.42	9.6	5.6	4.4	20	18.7	4.8	4	22	28	41
M10	1.5	10.58	9.42	12.2	6.6	5.4	24	22.7	5.8	5	26	32	45
M12	1.75	12.7	11.3	14.7	8.8	7.2	30	28.7	6.8	6	30	36	49
M16	2	16.7	15.3	19.9	12.9	11.1	38	36.4	8.9	8	38	44	57
M20	2.5	20.84	19.16	24.9	15.9	14.1	46	44.4	10.9	10	46	52	65
Tolerance on Length		20-30mm: ±1.05			35-50mm: ±1.25			55-80mm: ±1.5					
		90-120mm: ±1.75		130-150mm: ±2.0		160-180mm: ±4.0		200mm: ±4.6					

<b>Description</b>	A round head, self-anchoring bolt with a square neck under the head and a metric thread pitch.	
<b>Applications/ Advantages</b>	The square neck is designed to keep the bolt from turning as a nut is tightened. Best for use in wood or thick gauge sheet metal.	
<b>Material</b>	<i>Steel</i>	<i>Stainless</i>
	Class 4.6 carriage bolts shall be made from a carbon steel which conforms to the following chemical composition-- <b>Carbon:</b> 0.55% maximum; <b>Phosphorus:</b> 0.05% maximum; <b>Sulfur:</b> 0.06% maximum.	A2-50 and A4-50
<b>Hardness</b>	Rockwell B 67 - 99.5 (Vickers HV 120 - 250)	-
<b>Yield Strength</b>	240 N/mm <sup>2</sup> minimum	30,450 psi.
<b>Tensile Strength</b>	400 N/mm <sup>2</sup> minimum	72,500 psi.
<b>Plating</b>	See Appendix-A for plating information	Stainless carriage bolts typically are supplied without additional finishes.