


**WASHERS** External Tooth Lockwasher

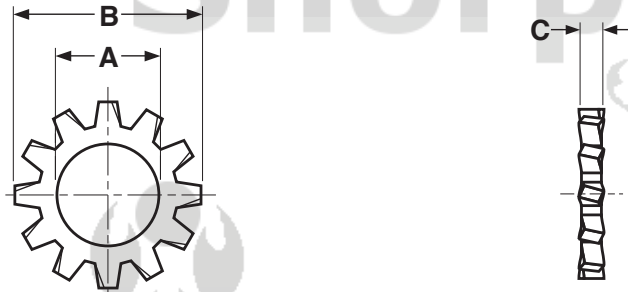

METRIC - EXTERNAL TOOTH LOCKWASHER						DIN 6797 A; JIS B 1255
Nominal Size	A		B		C	Preferred Number of Teeth per DIN spec*
	Inside Diameter		Outside Diameter		Washer Thickness	
	Max	Min	Max	Min	Ref	
M2	2.34	2.2	4.5	4.2	0.6	6
M2.5	2.84	2.7	5.5	5.2	0.8	6
M3	3.38	3.2	6	5.7	0.8	6
M3.5	3.88	3.7	7	6.64	1	6
M4	4.48	4.3	8	7.64	1	8
M5	5.48	5.3	10	9.6	1.2	8
M6	6.62	6.4	11	10.5	1.4	8
M8	8.62	8.4	15	14.5	1.6	8
M10	10.77	10.5	18	17.5	1.8	9
M12	13.27	13	20.5	19.98	2	10
M14	15.27	15	24	23.48	2	10
M16	17.27	17	26	25.4	2.4	12
M20	21.33	21	33	32.38	2.8	12

\*Slight deviation from the preferred number of teeth is permitted for JIS washers.

<b>Description</b>	A hardened circular washer with twisted prongs or “teeth” which extend out from the outer edge of the washer.	A “soft” stainless circular washer with twisted prongs or “teeth” which extend out from the outer edge of the washer.
<b>Applications/ Advantages</b>	This is the most preferable of all tooth-lock washers. It offers the greatest locking efficiency since the teeth are on the largest radius and provide greater torsional resistance.	
<b>Material</b>	Spring steel	A2 Stainless Steel
<b>Hardness</b>	Vickers 350-425 HV	-
<b>Plating</b>	See Appendix-A for information on the plating of steel lock washers.	Stainless washers are usually provided without additional finish.