


Six-Lobe
Recess

DRYWALL SCREWS, TRIM HEAD

Six-Lobe Drive Trim Head

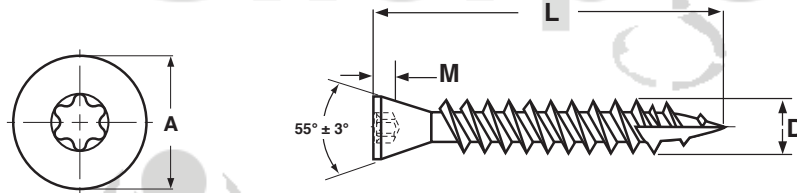

TRIM HEAD DRYWALL SCREWS

Nominal Size & Threads per Inch	A		M		D		Drive Size
	Head Diameter		Square Recess Depth		Thread Diameter		
	Max	Min	Max	Min	Max	Min	
7-10	0.236	0.223	0.067	0.058	0.168	0.161	T-15
Tolerance on Length			1 5/8" length		+0, -0.06"		
			2 1/4" length		+0, -0.07"		

NOTE: There is no single standard for trim head dry-wall screw dimensions. These values are offered as a guide; deviations from these specifications may occur.

Description	A screw with a coarse thread, extra sharp point with a chip cavity, a six-lobe recess and countersunk flat head of a width 1/3 less than a standard bugle drywall screws.
Applications/Advantages	For attaching wood trim or railing to fences. Type-17 point minimizes the chances of splitting wood. Stainless material offers superior resistance to corrosion.
Material	Class 305 or equivalent Stainless Steel
Finish	Screws are typically commercially passivated.