


# Bottom Projection Style

# Weld Screws

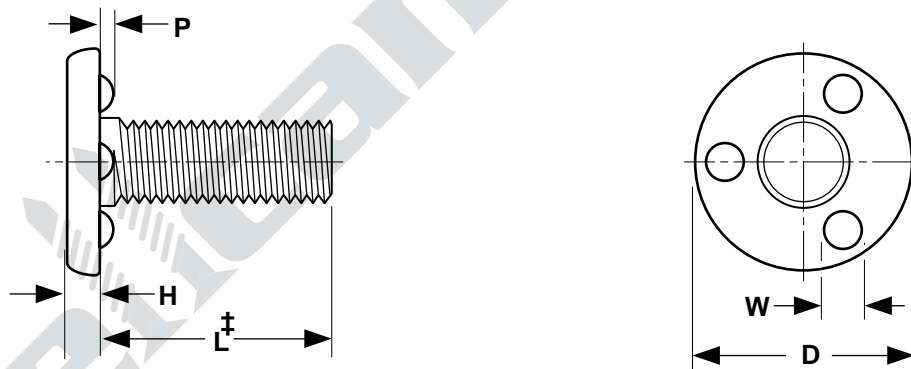

‡Length of weld studs is measured from the welding surface of the head to the end of the shank, excluding the projections.

STEEL WELD SCREWS WITH BOTTOM PROJECTIONS											Ohio Nut & Bolt*
Nominal Size or Basic Screw Diameter	Threads per Inch	D		H		P		W			
		Head Diameter		Head Height		Projection Height		Projection Width			
		Max	Min	Max	Min	Max	Min	Max	Min		
6	.138	32	.323	.303	.052	.042	.022	.018	.055	.045	
8	.164	32	.385	.365	.068	.058	.027	.023	.075	.065	
10	.190	24	.448	.428	.068	.058	.032	.028	.085	.075	
10	.190	32	.448	.428	.068	.058	.032	.028	.085	.075	
1/4	.250	20	.575	.550	.083	.073	.042	.038	.105	.095	
Tolerance on Length						Up to 1 in., Incl.: -.03					

WELD SCREWS WITH BOTTOM PROJECTIONS - PART NUMBER COMPARISON									
Size	Ohio Nut & Bolt Part Number	Size	Ohio Nut & Bolt Part Number	Size	Ohio Nut & Bolt Part Number	Size	Ohio Nut & Bolt Part Number	Size	Ohio Nut & Bolt Part Number
6-32 x 1/4	HW1104	8-32 x 3/8	HW1406	10-24 x 3/8	HW1506	10-32 x 3/8	HW1606	1/4-20 x 3/8	HW2106
6-32 x 3/8	HW1106	8-32 x 1/2	HW1408	10-24 x 1/2	HW1508	10-32 x 1/2	HW1608	1/4-20 x 1/2	HW2108
6-32 x 1/2	HW1108	8-32 x 5/8	HW1410	10-24 x 5/8	HW1510	10-32 x 5/8	HW1610	1/4-20 x 5/8	HW2110
6-32 x 5/8	HW1110	8-32 x 3/4	HW1412	10-24 x 3/4	HW1512	10-32 x 3/4	HW1612	1/4-20 x 3/4	HW2112
6-32 x 3/4	HW1112	8-32 x 1	HW1416	10-24 x 1	HW1516	10-32 x 1	HW1616	1/4-20 x 1	HW2116
6-32 x 1	HW1116								

<b>Description</b>	A fastener with unified thread pitch and a cylindrical, low profile head with flat parallel surfaces. The underside of the head has three hemispheroidal-shaped weld projections equally spaced on a locating circle concentric with the shank.
<b>Applications/Advantages</b>	Enables a threaded fastener to become a permanent, integral part of an assembly. The bottom projection style can assemble into a prelocated hole and is stronger than the top projection style, utilizing the full head strength of the fastener.
<b>Material</b>	C1008 - 1010 welding quality carbon steel
<b>Tensile Strength</b>	60,000 psi., minimum
<b>Length of Thread</b>	Studs with nominal lengths of 2 inches or less should have threads extend to within one thread of the top of the weld projections. Studs over 2 inches should have a minimum thread length of 1.75 inches.
<b>Finish</b>	Weld screws are supplied with a plain, unplated finish to facilitate welding.

\*Ohio Nut & Bolt is the original writer of these weld screw specifications.