


## Flat Square Recess w/Nibs

## TYPE-17 DECK

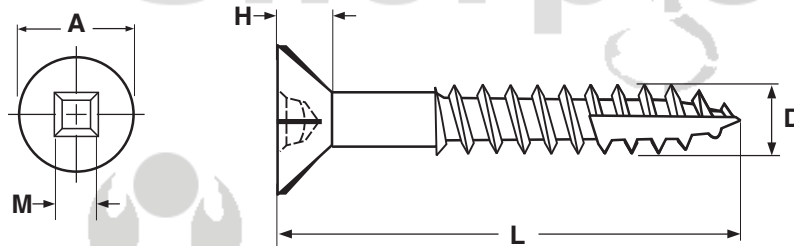

## FLAT HD WITH NIBS SQUARE RECESS DECK SCREW WITH TYPE-17 POINT

Nominal Diameter	A		H	M	D		Recess Size
	Head Diameter		Head Height	Recess Diam.	Major Diameter		
	Max	Min	Ref	Ref	Max	Min	
6	0.262	0.237	0.083	0.091	0.148	0.135	#1
8	0.312	0.285	0.150	0.112	0.177	0.157	#2
8	0.322	0.306	0.122	0.112	0.177	0.161	#2
9	0.336	0.309	0.150	0.112	0.198	0.187	#2
9	0.322	0.306	0.121	0.112	0.197	0.181	#2
10	0.377	0.342	0.172	0.112	0.215	0.204	#2
10	0.362	0.345	-	0.112	0.210	0.192	#2
Tolerance on Length	Up to 1.5"			± 0.05			
	Over 1.5 to 2.75"			± 0.06			
	Over 2.75"			± 0.09			

<b>Description</b>	An externally threaded fastener with a countersunk head, square socket recess, a single lead thread. The screw has a chip cavity cut out where the final several threads end at the tip.
<b>Applications / Advantages</b>	Designed for outdoor use with decks, spas, siding, fences and docks. Colored Ruspert coating is rated to resist environmental corrosion without streaking the treated lumber.
<b>Material</b>	Low Carbon Steel
<b>Surface Hardness</b>	Vickers HV 550 - 800
<b>Plating</b>	Available in green, tan and red Ruspert ceramic finishes rated as salt spray resistant for over 1,200 hours.